

05-26-00

A

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Socket No. : 39487/DBP/A400
 Inventor(s) : Hiroshi Kowaki
 Title : AUTOMOTIVE IN-CABIN AUDIO SYSTEM
 Express Mail Label No. : EL496229632US

U.S. PTO
 09/578355
 05/24/00

ADDRESS TO: Assistant Commissioner for Patents
 Box Patent Application
 Washington, D.C. 20231

Date: May 24, 2000

1. ☒ **FEE TRANSMITTAL FORM** *(Submit an original, and a duplicate for fee processing).*

2. **IF A CONTINUING APPLICATION**

_____ This application is a _____ of patent application No. _____.

Prior application information: Examiner ; Group Art Unit:

_____ This application claims priority pursuant to 35 U.S.C. §119(e) and 37 CFR §1.78(a)(4),
 to provisional Application No. _____.

3. **APPLICATION COMPRISED OF**

Specification

25 Specification, claims and Abstract (total pages)

Drawings

11 Sheets of drawing(s) (FIGS. 1 to 11)

Declaration and Power of Attorney

☒ Newly executed

_____ No executed declaration

_____ Copy from a prior application (37 CFR 1.63(d))(for continuation and divisional)

4. _____ **Microfiche Computer Program** *(Appendix)*

5. _____ **Nucleotide and/or Amino Acid Sequence Submission** *(if applicable, all necessary)*

_____ Computer Readable Copy

_____ Paper Copy (identical to computer copy)

_____ Statement verifying identity of above copies

6. **ALSO ENCLOSED ARE**

_____ Preliminary Amendment

_____ A Petition for Extension of Time for the parent application and the required fee are
 enclosed as separate papers

_____ Small Entity Statement(s)

_____ Statement filed in parent application, status still proper and desired

_____ Copy of Statement filed in provisional application, status still proper and desired

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.: 39487/DBP/A400


- ☒ An Assignment of the invention with the Recordation Cover Sheet and the recordation fee are enclosed as separate papers
This application is owned by pursuant to an Assignment recorded at Reel , Frame
☒ Information Disclosure Statement (IDS)/PTO-1449
☒ Copies of IDS Citations
☒ Certified copy of Priority Document(s) (*if foreign priority is claimed*)
☒ English Translation Document (*if applicable*)
☒ Return Receipt Postcard (MPEP 503) (should be specifically itemized).
☐ Other

7. CORRESPONDENCE ADDRESS

CHRISTIE, PARKER & HALE, LLP, P.O. BOX 7068, PASADENA, CA 91109-7068

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By 
D. Bruce Prout
Reg. No. 20,958
626/795-9900

DBP/sfc

AUTOMOTIVE IN-CABIN AUDIO SYSTEM

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

 The present invention relates to an automotive
in-cabin audio system or, in particular, to an
improvement of the audio effect of an automotive in-cabin
audio system in which an independent signal is sent to
10 each of a plurality of speakers in the cabin from a
multichannel player, that can reproduce the music sources
of a multichannel recording system, such as a DVD
(digital versatile disk) player.

15 2. Description of the Related Art

 Conventionally, vehicles such as automobiles
are equipped with an audio system for enjoying music in
the cabin. In early stages of development, a simple two-
channel stereophonic system comprising two speakers
arranged on the left and right side was the mainstay of
20 the audio system installed in the cabin. The demand for
enjoying better music in the cabin, however, has promoted
the extension of an in-cabin audio system with an
increased number of speakers installed in the cabin.

 An in-cabin audio system having six speakers is
25 an example. The six speakers include, for example, a
center speaker installed at the front center in the
cabin, a left front speaker and a right front speaker
installed on the front left side and the front right side
in the cabin, a left rear speaker and a right rear
30 speaker installed on the rear left side and the rear
right side in the cabin, and a woofer. As an advanced
form of this 6-speaker system, a tweeter is added to each
of the left and right front speakers. In this audio
system, the sound is reproduced from each speaker by
35 correcting the frequency characteristic and processing
the reverberation of the sound distributed to the left
and right channels. In the process, the sound heard by

an occupant in a rear seat, for example, produces an audio effect based mainly on the sound output from the rear speakers.

Recent years, on the other hand, have seen the extension of a multichannel audio system with an increased number of channels for music sources in place of the two-channel music sources such as the audio cassette and CD. A DVD system employing an independent 6-channel or 8-channel digital surround system is an example of the multichannel audio system.

In the DVD digital surround system, the music sources are reproduced from six speakers arranged in the cabin from the disks in which the music sources are recorded for the six speakers by independent multichannel recording systems. The six speakers for the DVD system include a center speaker, a front left speaker, a front right speaker, a rear left speaker, a rear right speaker and a woofer. The sound reproduced from the woofer is a low-pitched sound of not higher than 120 Hz and has a smaller amount of information than the other channels reproducing up to 20 kHz. The six channels in the DVD, therefore, are called 5.1 channels.

If it is assumed that the six speakers described are mounted in an automobile, in the case where an occupant (listener) is seated in the rear right seat, for example, the same sound is reproduced basically from the front right speaker and the rear right speaker of the conventional two-channel stereo system. In the case where the same sound is reproduced from the front right speaker and the rear right speaker, therefore, the sound heard by the listener seated in the rear right seat is governed by the rear right speaker.

In the case where the sound of 5.1 channels described above is reproduced from the six speakers, on the other hand, the sound reproduced from the five speakers other than the woofer can be freely controlled in view of the fact that the sound of the six channels

are recorded in the recording media independently. The sound can run around the listener, for example, in the case where the same sound is reproduced from the five speakers each with a predetermined time lag.

5 In the case where a music source is reproduced in such a manner that the sound runs around the listener as described above, however, the problem is that the sound heard by the listener seated in the rear right seat from the front left speaker far from him is low in
10 pressure with the high-pitched sound attenuated while the sound heard from the rear right speaker is high in pressure with a wide bandwidth with the result that the same sound is heard as a different sound for the listener.

15 This problem arises from the difference of the sound pressure and the frequency characteristic between the sound reproduced from the speakers far from the listening position and the speakers situated near the listener who listens to the independent sounds of many
20 channels of multichannel sources reproduced from a plurality of speakers. In the case where the sound reproduced from the front speakers and the rear speakers mounted on the vehicle are different, for example, the sound originating from the front speakers and the sound
25 originating from the rear speakers are heard differently by the occupant of the rear seat. In such a case, the sound coming from the front speakers is lower in sound pressure than the sound from the rear speakers and tends to have a deteriorated frequency characteristic,
30 especially in the high frequency range.

SUMMARY OF THE INVENTION

 Accordingly, the object of the present invention is to provide an in-cabin audio system in which multichannel sources recorded in a medium are reproduced from speakers
35 located at as many positions as the channels in such a manner that the signal reproduced from the medium by the player is processed in an amplifier unit arranged in the

stage before each speaker in accordance with the position of the person listening to the reproduced sound, thereby making it possible to reproduce the sound similar to the original sound from the medium at the position of the listener.

In order to achieve the object described above, the present invention is presented in first to seventh aspects described below.

According to a first aspect of the configuration of the invention, there is provided an audio system comprising a plurality of speakers located at a plurality of different positions in the automotive cabin, processed sound signal production means for separately retrieving the signal of the sound reproduced from a speaker located far from each seat in the cabin and delaying the particular signal in accordance with the distance to each speaker while at the same time attenuating the level of the particular signal in accordance with a predetermined law thereby to produce a processed sound signal, and signal adding means for adding the particular processed sound signal to the signal of the sound reproduced from a speaker near each seat.

According to a second aspect of the configuration of the invention, there is provided an audio system comprising a plurality of speakers located at a plurality of different positions in the automotive cabin, first signal adding means for separately retrieving and adding the signals of the sound reproduced from a plurality of the speakers located at positions far from each seat in the cabin, processed sound signal producing means for delaying the added signal in accordance with the distance to each speaker while at the same time attenuating the signal level in accordance with a predetermined law thereby to produce a processed sound signal, signal distribution means for distributing the processed sound signal among one or a plurality of speakers near each seat, and second signal adding means for adding each of

the distributed signals of the sound reproduced from the speakers near each seat.

According to a third aspect of the configuration of the invention, there is provided an audio system in which
5 the processed sound signal producing means in the first or second aspect further includes means for correcting the frequency characteristic of the processed sound signal.

According to a fourth aspect of the configuration of
10 the invention, there is provided an audio system in which a plurality of the speakers of the in-cabin audio system in the third aspect are configured with a center speaker installed at the front center in the cabin, a left front speaker and a right front speaker installed on the front
15 left and front right sides, respectively, in the cabin, a left rear speaker and a right rear speaker installed on the rear left and right sides, respectively, in the cabin and a woofer.

According to a fifth aspect of the configuration of
20 the invention, there is provided an audio system described in the fourth aspect, in which a device for sending a playback signal to the six speakers is a multichannel player for reproducing the signal recorded in a recording medium according to the multichannel
25 recording system.

According to a sixth aspect of the configuration of the invention, there is provided an audio system in which in the case where the sources of six channels are recorded in the recording medium and reproduced by the
30 multichannel player in the fifth aspect, the sound output from the center speaker and the left and right front speakers are added to the sound output from the left and right rear speakers, respectively, and the sound output from the left and right rear speakers are added to the
35 left and right front speakers and the center speaker, respectively.

According to a seventh aspect of the configuration

of the invention, there is provided an audio system in which, in the case where the sources of six channels are recorded in a recording medium and reproduced by the multichannel player in the sixth aspect, the sound output from the center speaker and the left and right front speakers are added to the sound output from the left and right rear speakers, respectively, and the sound output from the left and right rear speakers are added to the left and right front speakers, respectively.

According to an eighth aspect of the configuration of the invention, there is provided an audio system further comprising, in any one of the first to seventh aspects, a priority mode setting switch for determining a particular seat in the cabin which receives the optimum sound, in which the sound pressure of the center speaker, the left and right front speakers and the left and right rear speakers are changed in accordance with the setting of the switch.

According to the first to eighth aspects, in the case where the multichannel sources recorded in a medium are reproduced from speakers installed at as many points as the channels, the signal reproduced from the player for the medium is processed by the amplifier unit arranged in the stage before each speaker in accordance with the position of the listener listening to the sound reproduced from each speaker.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more clearly understood from the description as set forth below with reference to the accompanying drawings, wherein:

Fig. 1 is a perspective view showing the positions at which a plurality of speakers are installed in an automotive vehicle having an in-cabin audio system according to the invention;

Fig. 2 is a block diagram for explaining the configuration of an in-cabin audio system according to the invention;

Fig. 3 is a block diagram showing a circuit configuration of the matrix processing circuit of Fig. 2 according to a first embodiment;

Fig. 4 is a block diagram showing a circuit configuration of the matrix processing circuit according to a modification of the first embodiment shown in Fig. 3;

Fig. 5A is a diagram for explaining the delay time in the circuit of Figs. 3 and 4;

Fig. 5B is a characteristic diagram for explaining the delay time and the gain control of the circuit shown in Figs. 3 and 4;

Fig. 6 is a block diagram showing a circuit configuration of the matrix processing circuit of Fig. 2 according to a second embodiment;

Fig. 7 is a block diagram showing a circuit configuration of the matrix processing circuit of Fig. 2 according to a third embodiment;

Fig. 8 is a block diagram showing a circuit configuration of the matrix processing circuit according to a modification of the third embodiment shown in Fig. 7;

Fig. 9 is a block diagram showing a circuit configuration of the matrix processing circuit of Fig. 2 according to a fourth embodiment;

Fig. 10 is a block diagram showing a circuit configuration of the matrix processing circuit of Fig. 2 according to a fifth embodiment; and

Fig. 11 is a diagram showing the relation between the seat priority mode and the gain of each speaker for a three-row seat vehicle according to the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the invention will be described in detail below.

Fig. 1 is a perspective view showing the positions where a plurality of speakers are installed in an automotive vehicle 9 equipped with an in-cabin audio

system according to this invention. In Fig. 1, reference numeral 10 designates an audio unit installed on the instrument panel of the vehicle 9, characters CE a center speaker arranged at the central portion of the upper surface of the instrument panel of the vehicle, characters FL a left front speaker installed at the lower portion of the left front door, characters FR a right front speaker installed at the lower portion of the right front door, characters RL a left rear speaker installed at the lower portion of the left rear door, characters RR a right rear speaker installed at the lower portion of the right rear door, and characters WF a woofer for low-pitched sound installed on the rear shelf. According to this embodiment, the audio unit 10 is equipped with a DVD player as a multichannel player. The 6-channel signal reproduced by the DVD player is output to each speaker after being demodulated, corrected and amplified by the audio unit 10.

Fig. 2 is a diagram for explaining the configuration of an in-cabin audio system according to the invention and shows the connection between the audio unit 10 of Fig. 1 and each speaker. The audio unit 10 includes a DVD player 1 which is a multichannel player and an amplifier unit 2. The amplifier unit 2 is connected with the center speaker CE, the left and right front speakers FL, FR, the left and right rear speakers RL, RR and the woofer WF. A stream signal (digital signal) reproducing six channels is input from the DVD player 1 to the amplifier unit 2.

The amplifier unit 2 includes a DIR (digital interface receiver) 3, a DSP (digital signal processor) 4 and amplifiers 11 to 16 for driving the speakers. The DSP 4 includes a decoder 5, a matrix processing circuit 6 and an equalizer 7. The equalizer 7 is a multi-purpose equalizer such as a graphic equalizer or a parametric equalizer. The stream signal input from the DVD player 1 to the amplifier unit 2 is received by the DIR 3 and

input to the decoder 5. The decoder 5 decodes the stream signal and converts it into a signal SCE for the center speaker, signals SFL, SFR for the left and right front speakers, signals SRL, SRR for the left and right rear speakers and a signal SWF for the woofer.

The signals thus converted for the speakers are delayed, added and otherwise processed in the matrix processing circuit 6 as described later, and with the sound quality thereof adjusted in the equalizer 7, input to the amplifiers 11 to 16 for driving the speakers. The amplifier 11 is for driving the center speaker CE, the amplifier 12 for driving the left front speaker FL, the amplifier 13 for driving the right front speaker FR, the amplifier 14 for driving the left rear speaker RL, the amplifier 15 for driving the right rear speaker RR and the amplifier 16 for driving the woofer.

Now, the process of delaying and adding the driving signals for the speakers in the matrix processing circuit 6 according to the invention will be described below with reference to embodiments.

Fig. 3 is a block diagram showing the circuit configuration of the matrix processing circuit 6 of Fig. 2 according to a first embodiment. The reference characters noted on the left side of Fig. 3 designate the input signals to the matrix processing circuit 6 shown in Fig. 2. The matrix processing circuit 6 includes a plurality of signal processing circuits 20. These signal processing circuits 20 are each configured with an equalizer 21, a delay circuit 22 and an amplifier 23 connected in series. Reference numerals d1 to d3 in the delay circuit 22 indicate the delay time.

The delay time d1, d2, as shown in Fig. 5A, represent the time before the sound output from the center speaker CE reaches the left and right rear speakers RL, RR, respectively, or the time before the sound output from the rear speakers RL, RR, respectively, reach the center speaker CE. The delay time d3, d4, on

the other hand, represent the time before the sound output from the left and right front speakers FL, FR reach the opposed right and left rear speakers RR, RL, respectively, or the time before the sound output from the right and left rear speakers RR, RL reach the opposed left and right front speakers FL, FR, respectively. Further, the delay time d5, d6 represent the time before the sound output from the left and right front speakers FL, FR reach the adjacent left and right rear speakers RL, RR, respectively, or the time before the sound output from the left and right rear speakers RL, RR reach the adjacent left and right front speakers FL, FR, respectively. Thus, the relation holds that $(d1 \approx d2) > (d3 \approx d4) > (d5 \approx d6)$.

According to the first embodiment, as shown in Fig. 3, the signal SCE to the center speaker CE is divided, and a branch signal, with the frequency characteristic thereof adjusted by the equalizer 21 of the signal processing circuit 20, is delayed by the time d2 by the delay circuit 22, followed by being adjusted in gain downward in the amplifier 23 and added to the signal SRR input to the right rear speaker RR. Also, the signal SFL to the left front speaker FL is divided, and a branch signal with the frequency characteristic thereof adjusted by the equalizer 21 of the signal processing circuit 20, is delayed by the time d3 by the delay circuit 22, followed by being adjusted in gain downward in the amplifier 23 and added to the signal SRR input to the right rear speaker RR. Further, the signal SFR to the right front speaker FR is divided, and a branch signal with the frequency characteristic thereof adjusted by the equalizer 21 of the signal processing circuit 20, is delayed by the time d6 by the delay circuit 22, followed by being adjusted in gain downward in the amplifier 23 and added to the signal SRR input to the right rear speaker RR.

In similar fashion, the signal SCE to the center speaker CE is divided by the signal processing circuits 20, and a branch signal with the frequency characteristic thereof adjusted, is delayed by the delay time d1, adjusted in gain and added to the signal SRL input to the left rear speaker RL. Also, the signal SFL to the left front speaker FL is divided by the signal processing circuits 20, and a branch signal with the frequency characteristic thereof adjusted, is delayed by the delay time d5, adjusted in gain, and added to the signal SRL input to the left rear speaker RL. Further, the signal SFR to the right front speaker FR is divided by the signal processing circuits 20, and a branch signal thereof, after being adjusted in the frequency characteristic, delayed by the delay time d4 and adjusted in gain, is added to the signal SRL input to the left rear speaker RL.

Conversely, the signal SRL to the left rear speaker RL is divided by the three signal processing circuits 20, so that a branch signal adjusted in frequency characteristic, delayed by the delay time d1 and adjusted in gain is added to the signal SCE input to the center speaker CE, another branch signal adjusted in frequency characteristic, delayed by the delay time d4 and adjusted in gain is added to the signal SFR input to the right front speaker FR, and still another branch signal adjusted in frequency characteristic, delayed by the delay time d5 and adjusted in gain is added to the signal SFL input to the left front speaker FL. In similar fashion, the signal SRR to the right rear speaker RR is divided by the three signal processing circuits 20, so that a branch signal adjusted in frequency characteristic, delayed by the delay time d2 and adjusted in gain is added to the signal SCE input to the center speaker CE, another branch signal adjusted in frequency characteristic, delayed by the delay time d3 and adjusted in gain is added to the signal SFL input to the left

front speaker FL, and still another branch signal adjusted in frequency characteristic, delayed by the delay time d6 and adjusted in gain is added to the signal SFR input to the right front speaker FR.

5 As long as the center speaker CE is located on the center line of the vehicle, the relations can be maintained that $d1 = d2$, $d3 = d4$ and $d5 = d6$.

As described above, according to the first embodiment, the sound output from the center speaker CE, after the frequency characteristic thereof is adjusted, is delayed and attenuated and added to the sound output from the left and right rear speakers RL, RR, while the sound output from the left and right front speakers FL, FR, after the frequency characteristic thereof is adjusted, is delayed and attenuated and added to the sound output from the left and right rear speakers RL, RR. Also, the sound output from the left and right rear speakers RL, RR, after the frequency characteristic thereof is adjusted, is delayed and attenuated and output by being added to the left and right front speakers FL, FR and the center speaker CE. The signal SWF to the woofer WF is output without being processed in any way. This is because the sound output from the woofer is very low in frequency, and therefore is heard substantially the same way at any seat in the cabin. Also, it is difficult to reproduce the band of the woofer sound by the other speakers.

Now, the attenuation characteristic of the amplifier 23 in each signal processing circuit 20 will be explained with reference to Figs. 5A and 5B. The law of the first front (also called the Haas effect after the discoverer) has a controlling effect on the hearing sensation for the localization of the sound image in the direction of the sound wave arriving first at the position of the listener. According to this law, the reflected sounds arrive from various directions following the sound wave reaching the listener directly from the sound source in

the cabin, but the listener hears the sound in the same manner as if the sound sources are located in the direction of the sound. The loudspeakers in the concert hall or the like are designed based on this law.

5 Specifically, when the sound volume output from the front speaker of a singer singing on the stage is at a predetermined level, for example, the voice of the singer is heard as a low voice by the listeners in the rear seats. In order to compensate for this, the sound from
10 the rear speakers installed in the rear part of the seats is delayed and is output by being attenuated as compared with the sound volume of the front speakers. In this way, the loud speaker system of the concert hall or the like is designed to add to the sound volume in such a
15 manner as if the same sound as that from the stage (front speaker) is heard by the listener from the rear speakers.

If it is assumed that the center speaker CE, the left and right front speakers FL, FR, the left and right rear speakers RL, RR and the woofer WF are installed in
20 the automotive cabin as shown in Fig. 5A, and that a listener is seated at the position (rear seat) designated by P, the sound of level A shown in Fig. 5B is reproduced from the center speaker CE at time point t_0 . The dotted line lowering with time from the position of sound level
25 A represents the attenuation characteristic according to the aforementioned law. If it is assumed that the same sound of level B is reproduced from the right front speaker FR at time point t_1 slightly delayed behind time point t_0 , if the level B is lower than the attenuation
30 characteristic curve, the sound of level B is not heard by the listener P as if it is output from the right front speaker FR but as a single reproduced sound of level A output from the center speaker CE.

If it is assumed that the same sound of level C is
35 reproduced from the right rear speaker RR at time point t_2 further delayed slightly, in the case where the level C is higher than the attenuation characteristic curve,

the sound of level C is not heard by the listener as if it comes from the center speaker CE but as another sound output from the right rear speaker RR.

Thus, the delay characteristic of the delay circuit
5 22 and the attenuation characteristic of the amplifier 23 of each signal processing circuit 20 are based on the law of the first wave front. As a result, the in-cabin audio system according to the first embodiment can reproduce the sound similar to the original sound recorded in each
10 channel of the DVD at the listener's position in the case where the multichannel sources recorded in the DVD are reproduced from a plurality of speakers.

Fig. 4 shows a configuration of the matrix
processing circuit according to a modification of the
15 first embodiment of Fig. 3. The modification shown in Fig. 4 is different from the first embodiment only in the lack of the equalizer 21 in each signal processing circuit 20, and is based on the same method of adding the signal of each speaker to the signals of other speakers
20 as in the first embodiment. In this way, the absence of the equalizer 21 in the signal processing circuit 20 can reduce the processing amount and hence the size of the circuit configuration in spite of the slightly reduced latitude of sound correction.

Fig. 6 shows a configuration of the matrix
processing circuit 6 of Fig. 2 according to a second
embodiment. In the first embodiment, the sound from the
center speaker CE and the sound from the left and right
front speakers FL, FR are output by being adjusted and
30 added to the left and right rear speakers RL, RR, while the sound from the left and right rear speakers RL, RR are output by being adjusted and added to the left and right front speakers FL, FR and the center speaker CE. In the second embodiment, on the other hand, the sound
35 from the center speaker CE and the sound from the left and right front speakers FL, FR are adjusted and added to the sound from the left and right rear speakers RL, RR as

in the first embodiment, but the second embodiment is different from the first embodiment in that the sound from the left and right rear speakers RL, RR is adjusted and added only to the left and right front speakers FL, FR but not to the center speaker CE. This is because the left and right front speakers FL, FR and the center speaker CE, which are located forward as viewed from the rear speakers, can produce a substantially similar effect without adding the sound of the left and right rear speakers RL, RR to the center speaker CE.

Fig. 7 shows a configuration of the matrix processing circuit of Fig. 2 according to a third embodiment. According to the first and second embodiments, the signal to each front speaker is added to the signal to each rear speaker or the signal to each rear speaker is added to the signal to each front speaker through a signal delay circuit 20 individually connected between each signal line to each speaker. According to the third embodiment, in contrast, in the case where the signal to each front speaker is added to the signal to each rear speaker, the signals to the front speakers are added in advance and the resulting signal is added to each rear speaker through a single signal processing circuit 20. Also, in the case where the signal to each rear speaker is added to the signal to each front speaker, the signals to the rear speakers are added in advance and the resulting signal is added to each front speaker through a single signal processing circuit 20.

According to the third embodiment, therefore, as shown in Fig. 7, the signal SCE to the center speaker CE, the signal SFL to the left front speaker FL and the signal SFR to the right front speaker FR branch off, and each branching signal is input to an adder 32 through a gain regulator 31. The adder 32 adds the signal SCE to the center speaker CE, the signal SFL to the left front speaker FL and the signal SFR to the right front speaker FR, thus producing a synthetic signal MF, which is

applied to the signal processing circuit 20.

The signal processing circuit 20, which has the same configuration as in the first and second embodiments, includes an equalizer 21, a delay circuit 22 and an amplifier 23. The synthetic signal MF input to the signal processing circuit 20, after being adjusted in frequency characteristic by the equalizer 21, is delayed by time dt by the delay circuit 22. The delay signal branches after being adjusted in gain downward by the amplifier 23, and is added to the signal SRL to the left speaker RL and the signal SRR to the right rear speaker RR.

On the other hand, the signal SRL to the left rear speaker RL and the signal SRR to the right rear speaker RR also branch, and are input to the adder 32 through the gain regulator 31. The adder 32 adds the signal SRL input to the left rear speaker RL and the signal SRR input to the right rear speaker RR, and thus produces a synthetic signal MR, which is input to the signal processing circuit 20. The synthetic signal MR input to the signal processing circuit 20, after being adjusted in frequency characteristic in the equalizer 21 and delayed by time dt by the delay circuit 22, is adjusted in gain downward by the amplifier 23. The resulting signal branches, and is added to the signal SCE input to the center speaker CE, the signal SRL input to the left speaker RL and the signal SRR input to the right rear speaker RR.

Also in the third embodiment, the delay time in the delay circuit 22 of the signal processing circuit 20 and the gain attenuation characteristic of the amplifier 23 are determined in accordance with the law of the first wave front described with reference to Fig. 5B.

According to the third embodiment, the amount of signal processing is reduced ignoring the small difference of delay time between the front speakers and the rear speakers. In a small space like the automotive cabin, a

considerable effect is achieved even if a small delay time is ignored between each of the front speakers and each of the rear speakers.

Fig. 8 shows a configuration of the matrix processing circuit 6 according to a modification of the third embodiment. The modification of Fig. 7 is different from the third embodiment only in the lack of the equalizer 21 from each signal processing circuit 20. The signal to each speaker is added to the signals to other speakers by the same method as that of the third embodiment. In this way, the absence of the equalizer 21 in the signal processing circuit 20 can reduce the amount of processing and hence the size of the circuit configuration at the sacrifice of a somewhat reduced latitude of sound correction.

Fig. 9 shows a configuration of the matrix processing circuit 6 of Fig. 2 according to a fourth embodiment. The fourth embodiment is different from the third embodiment only in the manner in which the output of the signal processing circuit 20 is applied to the left and right front speakers FL, FR and the left and right rear speakers RL, RR.

According to the third embodiment, the output of the signal processing circuit 20 is applied to the left and right front speakers FL, FR and the left and right rear speakers RL, RR with the same gain. The fourth embodiment, on the other hand, comprises as many independent amplifiers 23 of the signal processing circuit 20 as the destination lines. As long as the gain of each amplifier 23 is adjustable, therefore, the level of the sound reproduced from each speaker can be adjusted appropriately in accordance with the position of the listener seated in the cabin by regulating the gain of each amplifier 23 in accordance with the position of the listener.

Fig. 10 shows a configuration of the matrix processing circuit 6 of Fig. 2 according to a fifth

embodiment. The fifth embodiment is different from the third embodiment only in the provision of as many signal processing circuits 20 as the destination lines.

According to the third embodiment, the output of the
5 signal processing circuit 20 is applied to the left and right front speakers FL, FR and the left and right rear speakers RL, RR with the same gain. In the fifth embodiment comprising as many signal processing circuits 20 as the destination lines, on the other hand, as long
10 as the delay time of each delay circuit 22 of each signal processing circuit 20 and the gain of each amplifier 23 are adjustable, the level of the reproduced sound from each speaker can be appropriately adjusted in accordance with the position of the listener by adjusting the delay
15 time of each delay circuit 22 and the gain of each amplifier 23. According to the fifth embodiment, only the delay time of the delay circuit 22 of the signal processing circuit 20 connected to the signal SCE input to the center speaker CE is differentiated from the other delay time.
20

Fig. 11 shows the relation between the seat priority mode and the gain of each speaker in an application of the invention to a three-row seat vehicle. In the case where three rows of seats are arranged in the automotive
25 cabin, this embodiment permits the priority to be switched to the row of seats in which a given listener is seated. In the case where the seats in the first row are given priority, for example, the priority mode is set to the first row of the seats so that the sound pressure of
30 the left and right rear speakers RL, RR rises. In the process, the sound pressure of the left and right front speakers FL, FR and the center speaker CE are maintained at an intermediate level. In the case where the seats in the second row are given priority, on the other hand, the
35 priority mode is switched to the second row of the seats. In this case, the sound pressure of the left and right rear speakers RL, RR, the sound pressure of the left and

right front speakers FL, FR and the sound pressure of the center speaker CE are all maintained at about an intermediate level. Further, in the case where the seats in the third row are given priority, the priority mode is
5 switched to the seats in the third row, so that the sound pressure of the left and right rear speakers RL, RR is maintained at about an intermediate level while the sound pressure of the left and right front speakers FL, FR and the center speaker CE is raised.

10 As described above, an in-cabin audio system according to this invention is applicable with equal effect to the audio system installed in the cabin of the automobile having three rows of seats.

15 The embodiments described above refer to the in-cabin audio system using the DVD player. Nevertheless, the multichannel player is not specifically limited to the DVD player.

Also, apart from the in-cabin audio system described in the foregoing embodiments, the present invention is
20 effectively applicable also to the case in which the sound of a multichannel player is reproduced in an ordinary room of a house.

It will thus be understood from the foregoing description that according to the present invention,
25 there is provided an in-cabin audio system, in which multichannel sources recorded in a medium are reproduced from speakers installed at as many points as the channels involved in such a manner that the signal reproduced from the player for the medium is processed in an amplifier
30 unit arranged in the stage before each speaker. In this way, the sound similar to the original sound recorded in the medium can be reproduced at the position of the listener.

What is claimed is:

1. An audio system comprising a plurality of speakers arranged at a plurality of different points in the cabin of an automobile, comprising:

5 circuit for retrieving a branch of the signal of the sound reproduced from at least a speaker located far from a given seat in the cabin, delaying said signal in accordance with the distance from said seat to said speaker, and producing a processed sound signal by
10 attenuating the level of said signal in accordance with a predetermined law; and

circuit for adding said processed sound signal to the signal of the sound reproduced from at least a speaker located near said seat.

15 2. An in-cabin audio system according to claim 1, wherein said processed sound signal producing circuit further corrects the frequency characteristic of said processed sound signal.

20 3. An in-cabin audio system according to claim 1, wherein a plurality of said speakers include a center speaker installed at the center front in the cabin, a left front speaker and a right front speaker installed on the front left side and the front right side, respectively, in the cabin, a left rear speaker and
25 a right rear speaker installed on the left rear side and the right rear side, respectively, in the cabin, and a woofer.

30 4. An in-cabin audio system according to claim 1, further comprising a switch for setting a priority mode to determine a seat in said cabin which receives the optimum sound, wherein the sound pressure of said center speaker, said left and right front speakers and said left and right rear speakers is changed in accordance with the setting of said switch.

35 5. An in-cabin audio system according to claim 2, wherein a plurality of said speakers include a center speaker installed at the center front in

the cabin, a left front speaker and a right front speaker installed on the front left side and the front right side, respectively, in the cabin, a left rear speaker and a right rear speaker installed on the left rear side and the right rear side, respectively, in the cabin, and a woofer.

6. An in-cabin audio system according to claim 5, wherein a device for sending out a playback signal to said six speakers is a multichannel player unit (1) for reproducing the data recorded in a recording medium according to the multichannel recording scheme.

7. An in-cabin audio system according to claim 6, wherein in the case where six-channel sources are recorded in said recording medium reproduced by said multichannel player unit, the sound from said center speaker and said left and right front speakers are output by being added to the sound output from said left and right rear speakers, respectively, and the sound from said left and right rear speakers are output by being added to the left and right front speakers and the center speaker.

8. An in-cabin audio system according to claim 7, wherein in the case where six-channel sources are recorded in said recording medium reproduced by said multichannel player unit, the sound from said center speaker and said left and right front speakers are output by being added to the sound from said left and right rear speakers, respectively, and the sound from said left and right rear speakers are output by being added to the left and right front speakers and the center speaker.

9. An in-cabin audio system according to claim 8, further comprising a switch for setting a priority mode to determine a seat in said cabin which receives the optimum sound, wherein the sound pressure of said center speaker, said left and right front speakers

and said left and right rear speakers is changed in accordance with the setting of said switch.

10. An audio system comprising a plurality of speakers arranged at a plurality of different points in the cabin of an automobile, comprising:

first signal adding circuit for retrieving a branch of the signal of the sound reproduced from a plurality of speakers located far from a given seat in the cabin and adding said signals to each other;

circuit for delaying the sum signal in accordance with the distance to each of said speakers and producing a processed sound signal by attenuating the level of said signal in accordance with a predetermined law;

circuit for distributing said processed sound signal to one or a plurality of speakers near each seat; and

second signal adding circuit for adding the distributed signals to the signal of the sound reproduced from the speaker near each seat.

11. An in-cabin audio system according to claim 10, wherein said processed sound signal producing circuit further corrects the frequency characteristic of said processed sound signal.

12. An in-cabin audio system according to claim 10, wherein a plurality of said speakers include a center speaker installed at the center front in the cabin, a left front speaker and a right front speaker installed on the front left side and the front right side, respectively, in the cabin, a left rear speaker and a right rear speaker installed on the left rear side and the right rear side, respectively, in the cabin, and a woofer.

13. An in-cabin audio system according to claim 10, further comprising a switch for setting a priority mode to determine a seat in said cabin which receives the optimum sound, wherein the sound pressure of

said center speaker, said left and right front speakers and said left and right rear speakers is changed in accordance with the setting of said switch.

5 14. An in-cabin audio system according to claim 11,
 wherein a plurality of said speakers
include a center speaker installed at the center front in
the cabin, a left front speaker and a right front speaker
installed on the front left side and the front right
side, respectively, in the cabin, a left rear speaker
10 and a right rear speaker installed on the left rear side
and the right rear side, respectively, in the cabin, and
a woofer.

15 15. An in-cabin audio system according to claim 14,
 wherein a device for sending out a
 playback signal to said six speakers is a multichannel
player unit for reproducing the data recorded in a
recording medium according to the multichannel recording
scheme.

20 16. An in-cabin audio system according to claim 15,
 wherein in the case where six-channel
sources are recorded in said recording medium reproduced
by said multichannel player unit, the sound from said
center speaker and said left and right front speakers are
output by being added to the sound output from said left
25 and right rear speakers, respectively, and the sound from
said left and right rear speakers are output by being
added to the left and right front speakers and the center
speaker.

30 17. An in-cabin audio system according to claim 16,
 wherein in the case where six-channel
sources are recorded in said recording medium reproduced
by said multichannel player unit, the sound from said
center speaker and said left and right front speakers are
output by being added to the sound from said left and
35 right rear speakers, respectively, and the sound from
said left and right rear speakers are output by being
added to the left and right front speakers and the center

speaker.

18. An in-cabin audio system according to claim 17,
further comprising a switch for setting a
priority mode to determine a seat in said cabin which
5 receives the optimum sound, wherein the sound pressure of
said center speaker, said left and right front speakers
and said left and right rear speakers is changed in
accordance with the setting of said switch.

00420" 556666

AUTOMOTIVE IN-CABIN AUDIO SYSTEM

5

ABSTRACT OF THE DISCLOSURE

An automotive in-cabin audio system comprising a plurality of speakers installed at different positions in the cabin is disclosed, in which the playback signal from a multichannel player having sources of at least three channels recorded therein is processed in accordance with the position of a listener seated in the cabin thereby to reproduce a sound similar to the original sound at the position of the listener. The signal of the sound reproduced from a speaker far from each seat in the cabin is retrieved as a branch signal and delayed in accordance with the law of the first wave front. At the same time, the level of the particular signal is attenuated to produce a processed sound signal, which is added to the signal of the sound reproduced from the speaker near each seat. As a result, a sound similar to the original sound can be heard at any hearing position in the cabin.

Fig.1

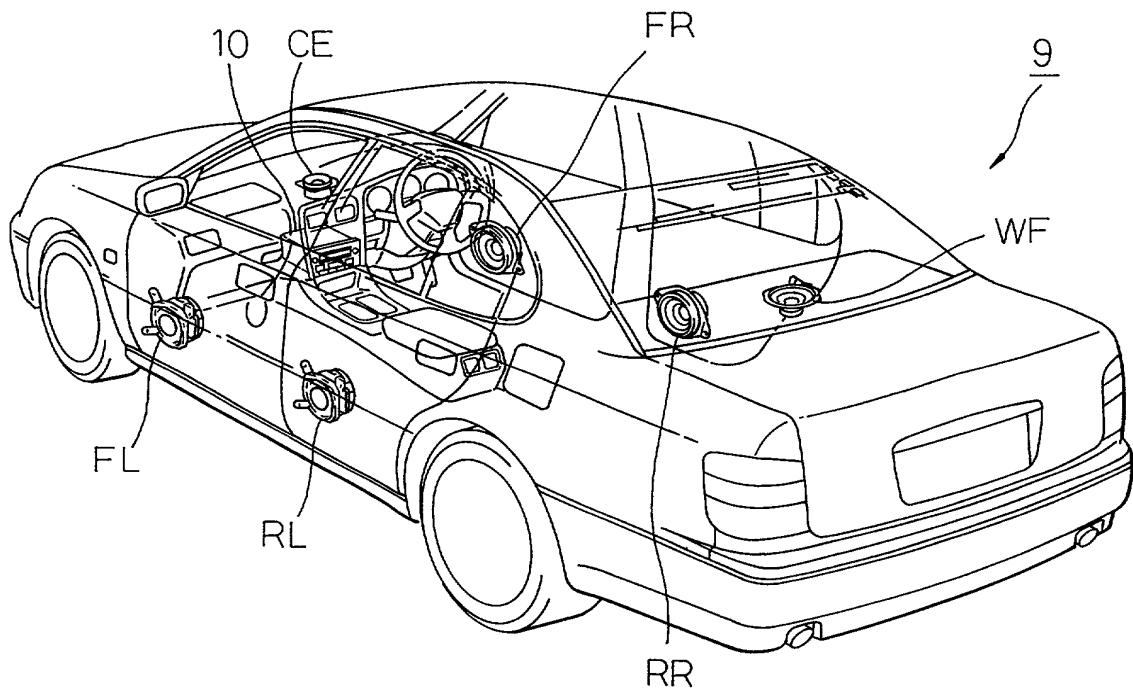


Fig.2



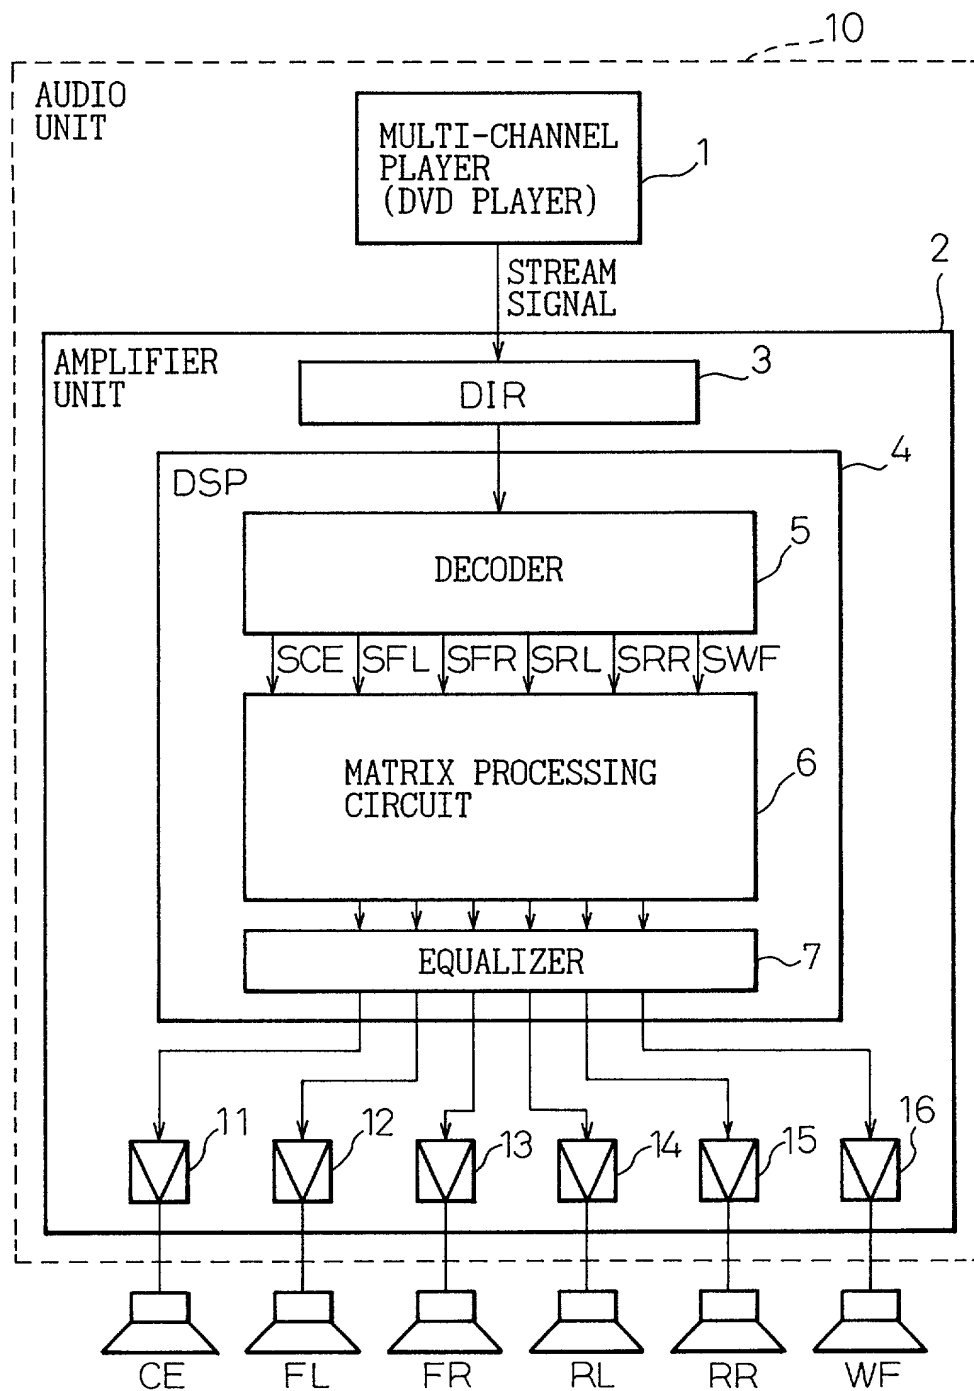


Fig.3

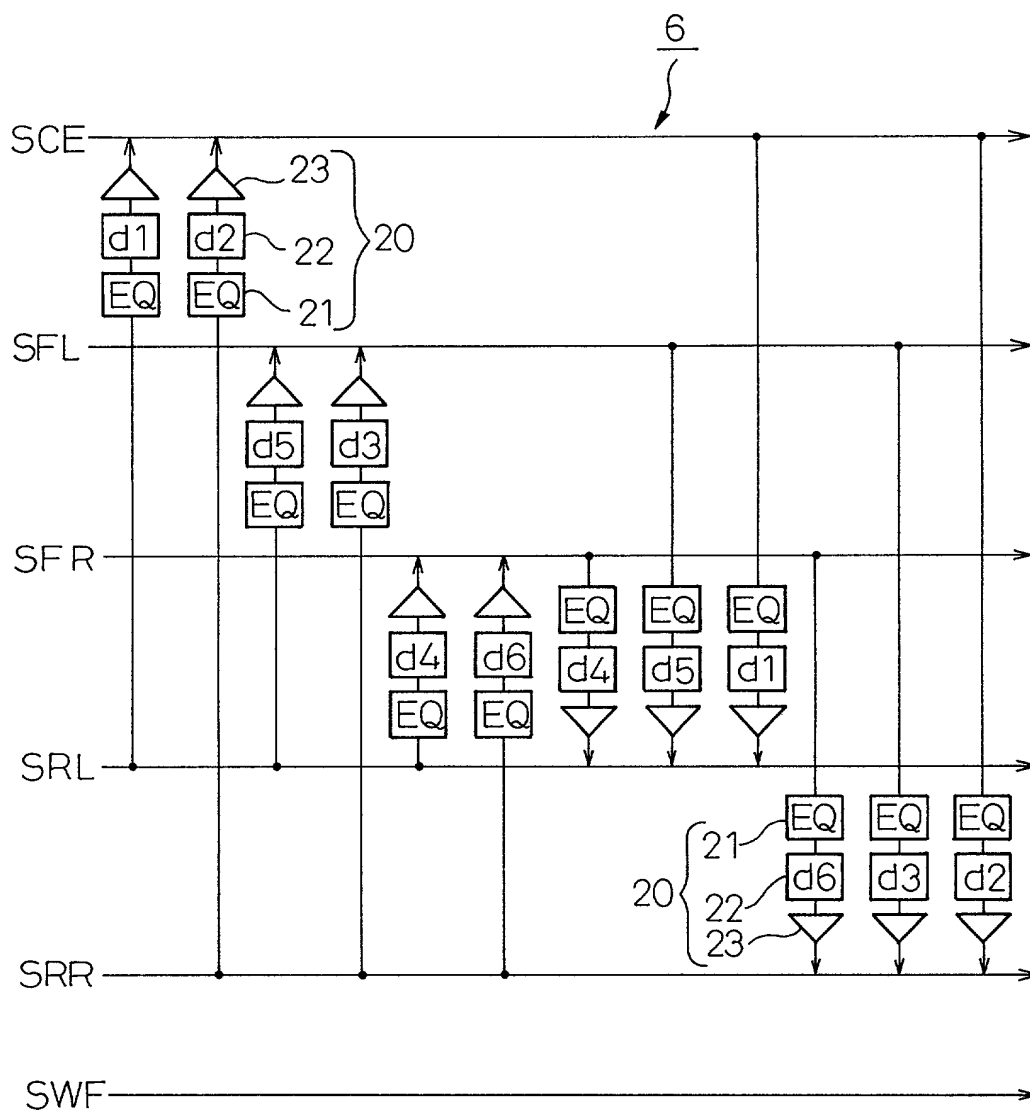

d1~d6: DELAY TIME

Fig.4

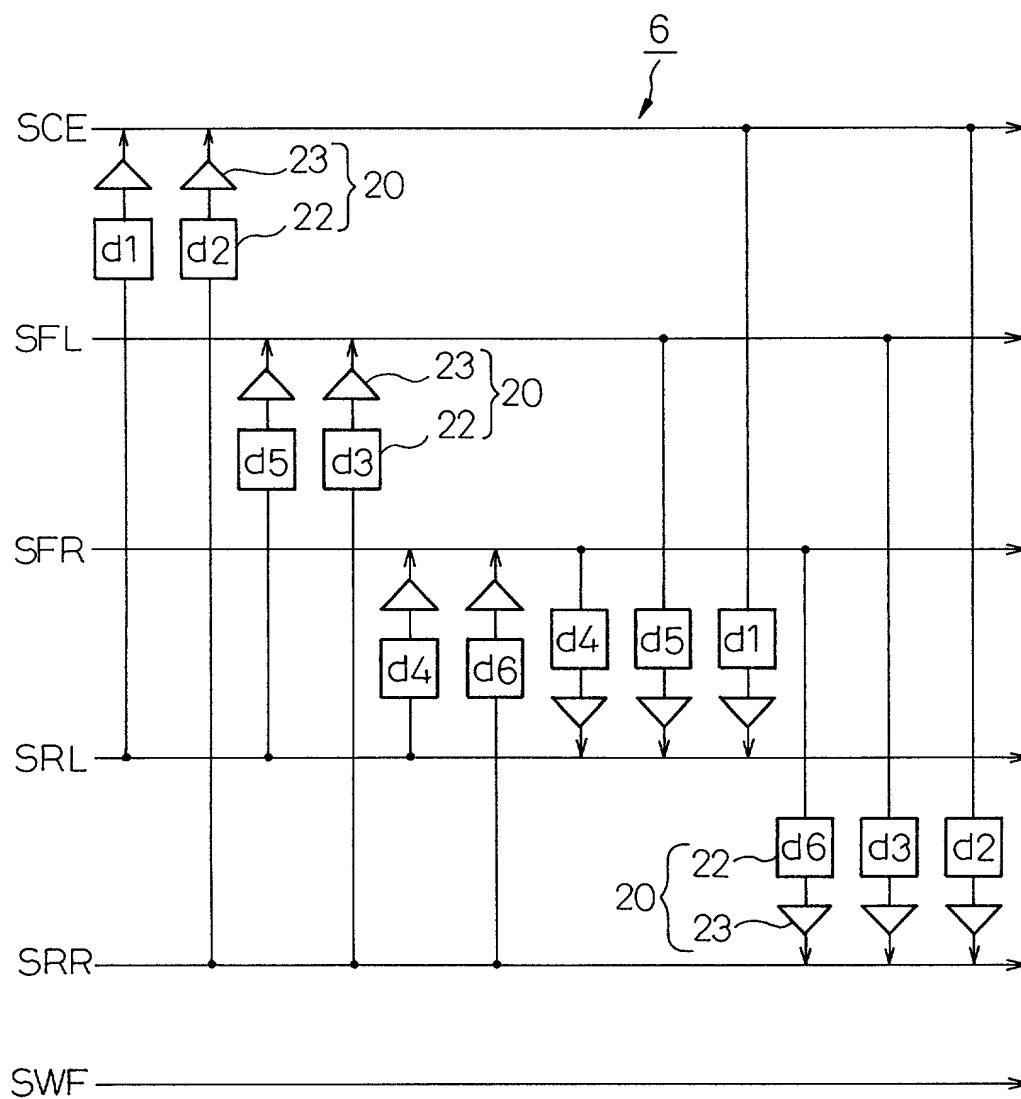

d1~d6: DELAY TIME

Fig.5A

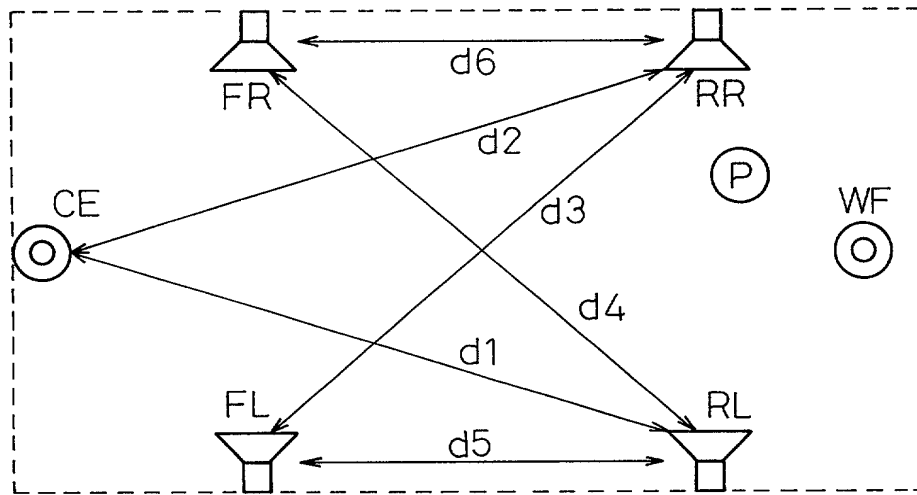


Fig.5B

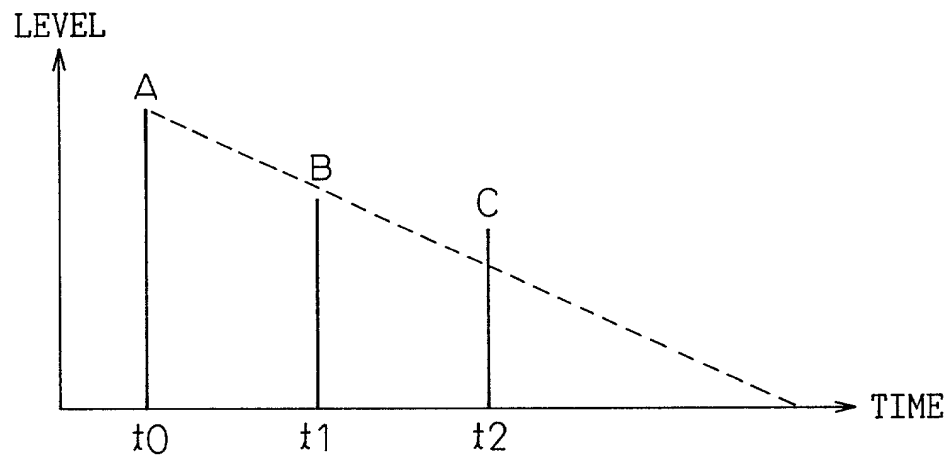


Fig.6


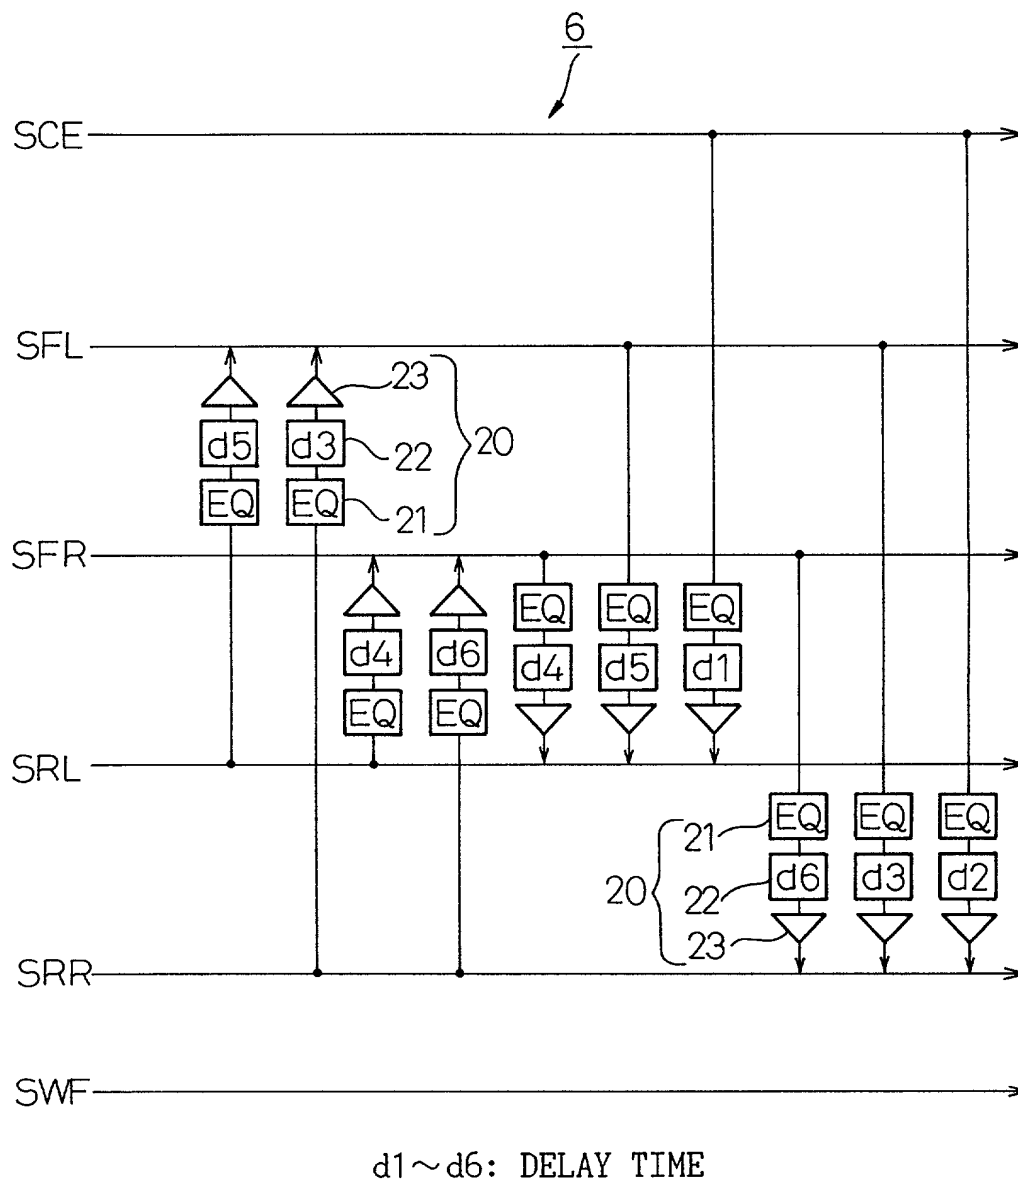


Fig.7

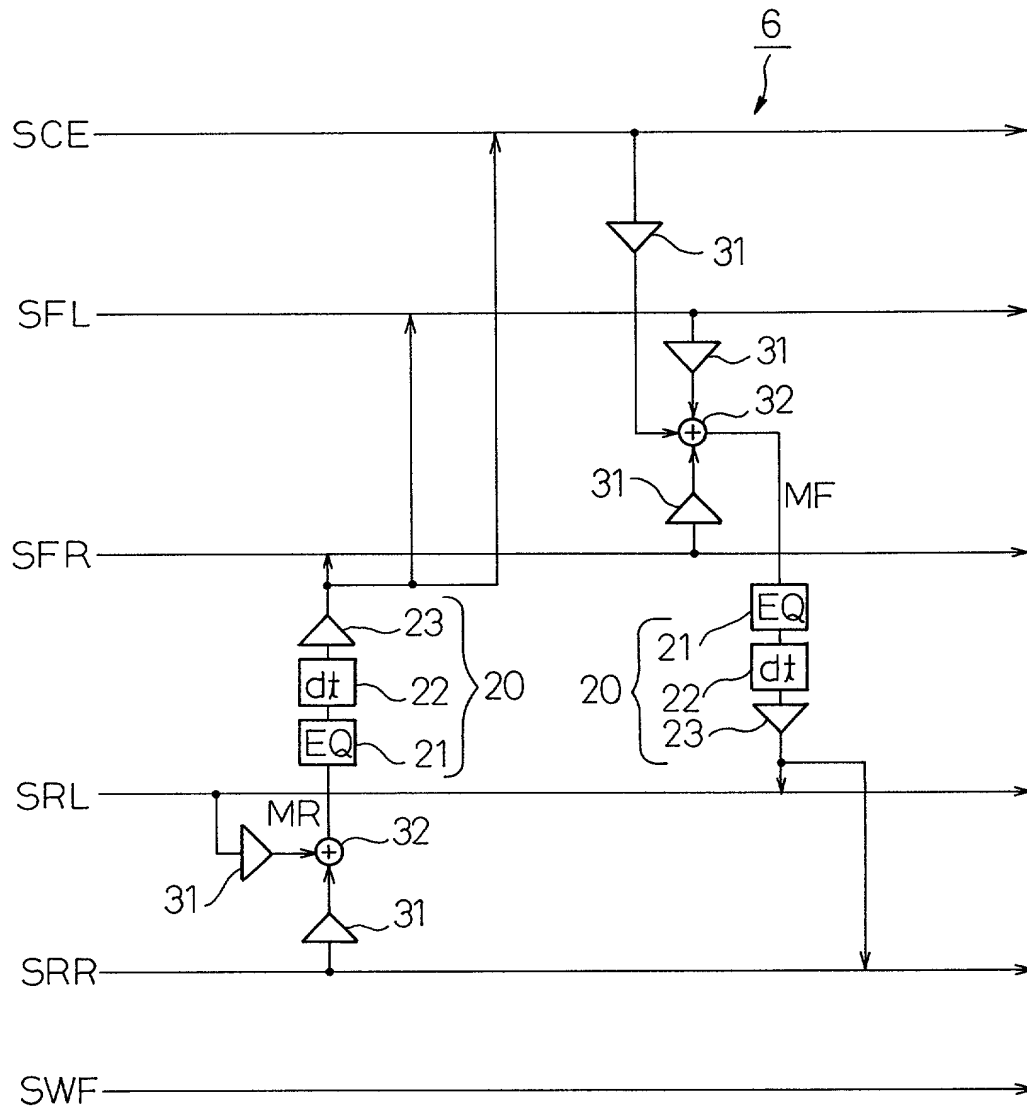

dt: DELAY TIME

dt: DELAY TIME

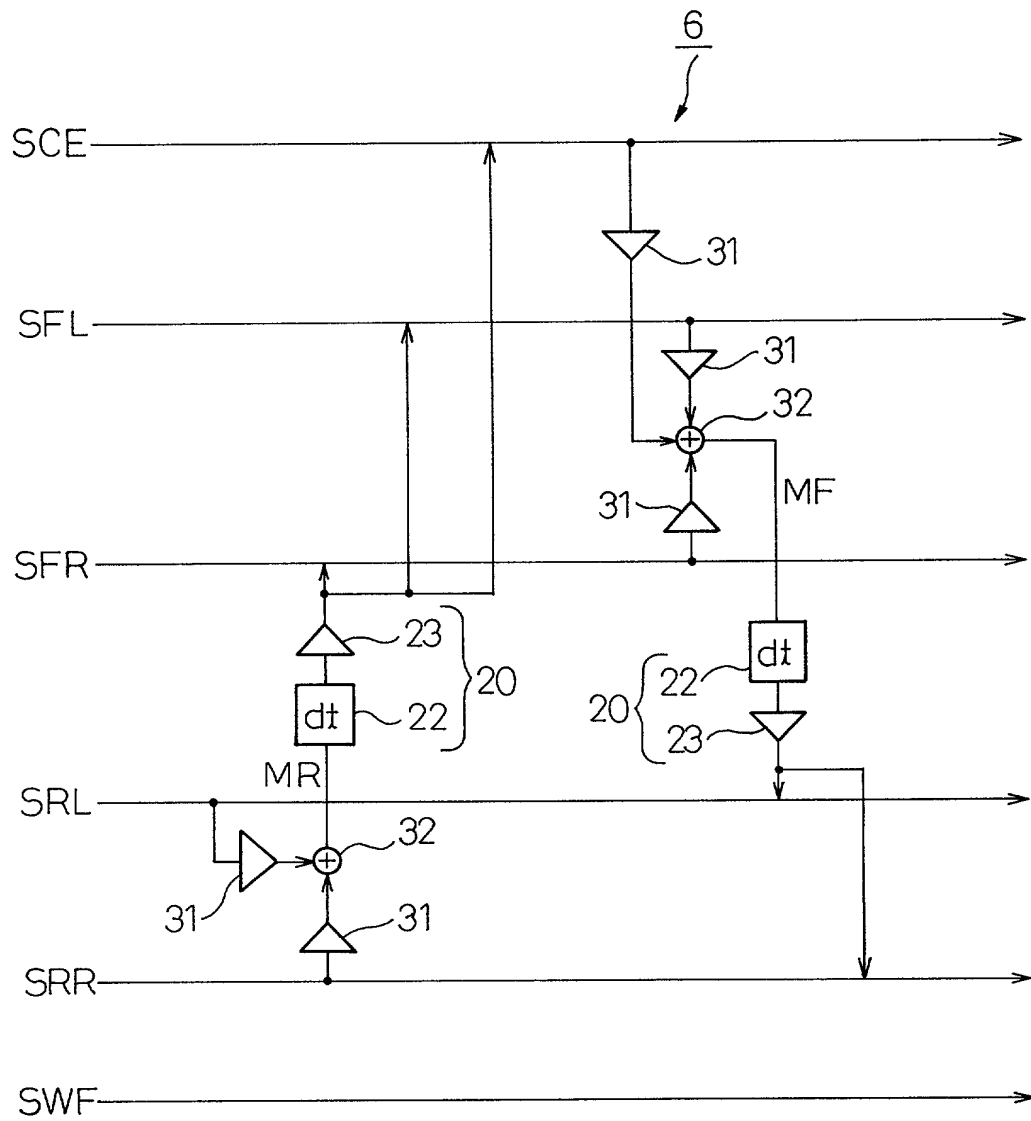


Fig.9


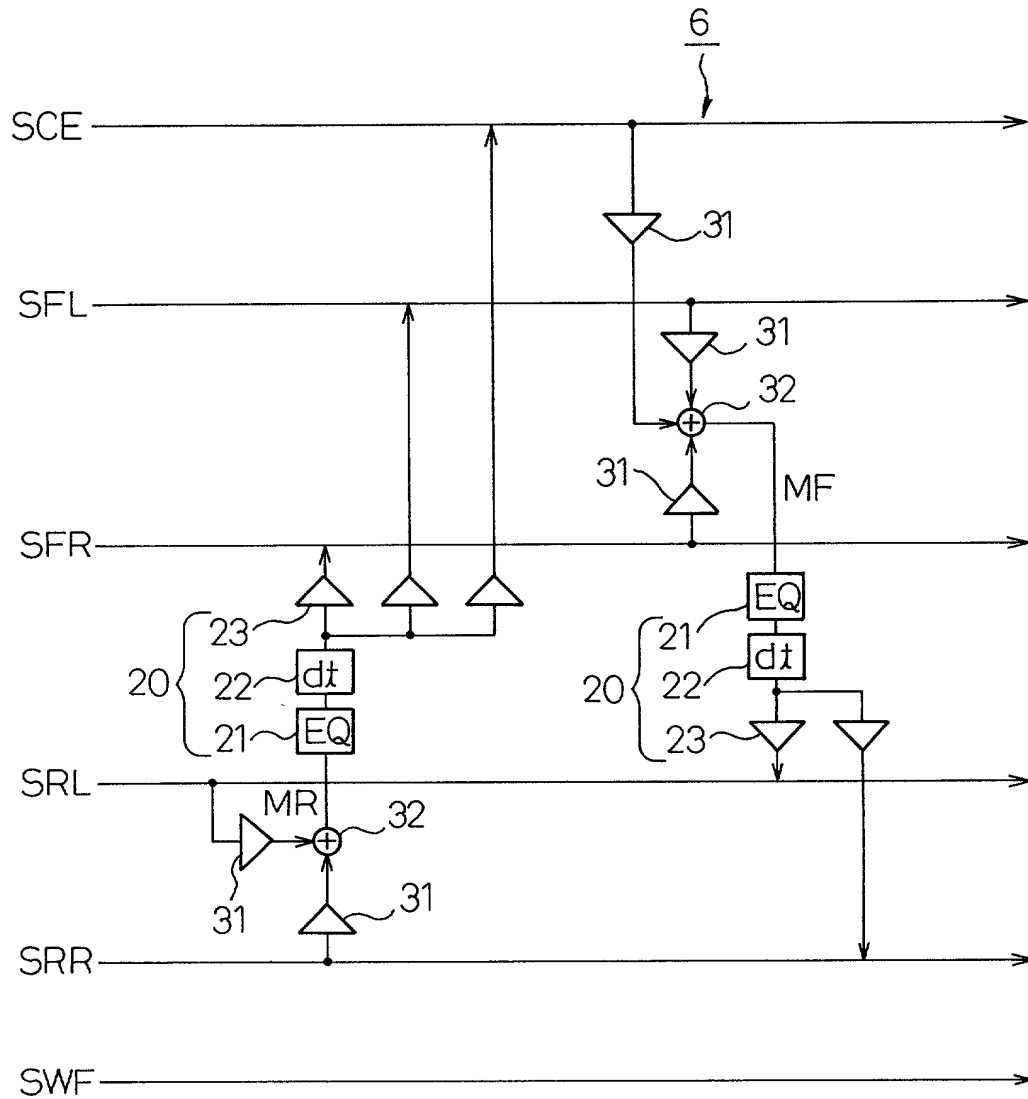


Fig.10

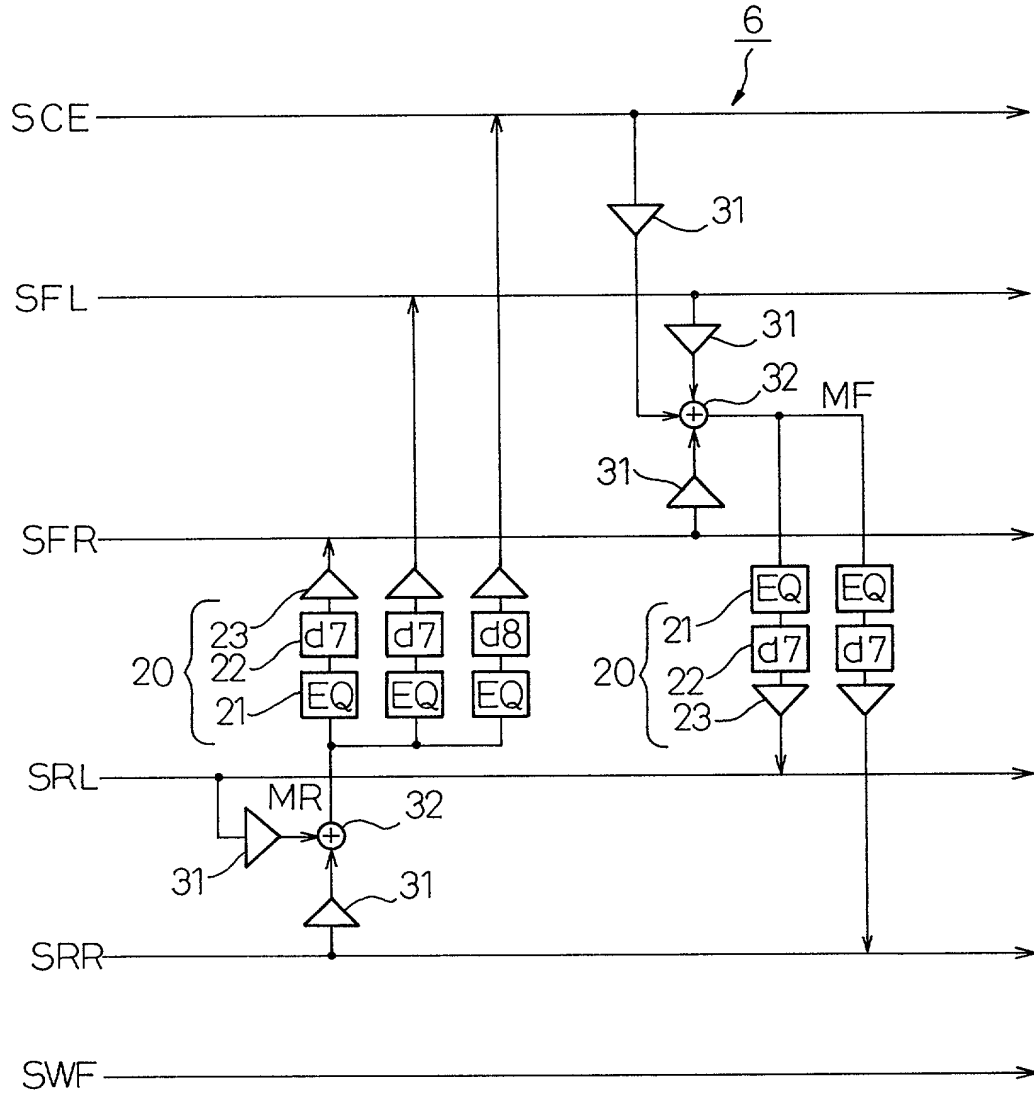

d7, d8: DELAY TIME

Fig.11

		GAIN		
PRIORITY MODE	SPEAKER POSITION	CENTER	FRONT	REAR
	FRONT SEATS	MIDDLE	MIDDLE	LARGE
	MIDDLE SEATS	MIDDLE	MIDDLE	MIDDLE
	REAR SEATS	LARGE	LARGE	MIDDLE

(Christie)

PTO/SB/106 (8-96)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

AUTOMOTIVE IN-CABIN AUDIO SYSTEM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
 （該当する場合） _____ に訂正されました。

☐ was filed on _____
 as United States Application Number or
 PCT International Application Number
 _____ and was amended on
 _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情状を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-148317 (Pat. Appln.) Japan
(Number) (Country)
(番号) (国名)

(Number) (Country)
(番号) (国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.) (Filing Date)
(出願番号) (出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願を提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (Filing Date)
(出願番号) (出願日)

(Application No.) (Filing Date)
(出願番号) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

27/May/1999
(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (Filing Date)
(出願番号) (出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許商標局に対して遂行する弁護士または代理人
として、下記の者を指名いたします。(弁護士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)
Please see attachment

書類送付先

Send Correspondence to:

D. Bruce Prout, Esq.
Christie, Parker & Hale, LLP
350 West Colorado Boulevard, Suite 500
Pasadena, CA 91105 U.S.A.

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

D. Bruce Prout, Esq.
(626) 795-9900
(626) 577-8800 FAX

唯一または第一発明者名

Full name of sole or first inventor

Hiroshi Kowaki

発明者の署名

日付

Inventor's signature

Date

Hiroshi Kowaki

May 15, 2000

住所

Residence

Kobe-shi, Hyogo, Japan

国籍

Citizenship

Japanese

私書箱

Post Office Address

c/o FUJITSU TEN LIMITED, 1-2-28,

Gosho-dori, Hyogo-ku, Kobe-shi, Hyogo, Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)